

CTH V Pavement Replacement Project (STH 25 – 665th St.)

Project Length = 21,750ft (4.12 miles)
Estimated Project Cost \$1,000,000

Typical Finished Roadway Cross Section
30ft total = 24ft Asphalt + 3ft Base Course Shoulders
Asphalt = 3 ½” Compacted thickness


Mix Design: Warm Mix Asphalt (4LT58-28S)
Asphalt Total = 11,500 Tons WMA

Base Course
Add 3” Base Course to Existing Roadway Before Pulverizing
Total Estimated Limerock Quantities = (11,000 tons 1 ¼”, 3000 tons ¾”)

Intersections
All intersections will be constructed with a WisDOT Type C.

Culvert/Drainage Work
Replace all cross culverts with HDPE culverts on project
Clean or Replace driveway culverts as needed
Re-slope ditches as required

Mailboxes
Relocate mailboxes as required to meet standard height and offset

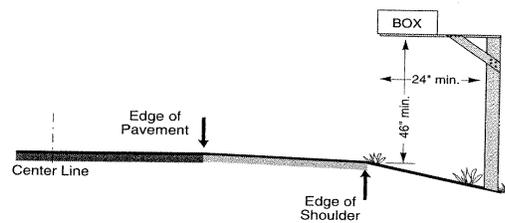

Traffic Control
CTH V will be open during construction with temporary lane closures.

Project Schedule
The project is anticipated to start in mid summer of 2020.